
Hammersmith Bollard.

Product Data sheet

Product Code
BD-HAM1-BD10

Hammersmith Cast Iron
Root Fixed bollard.

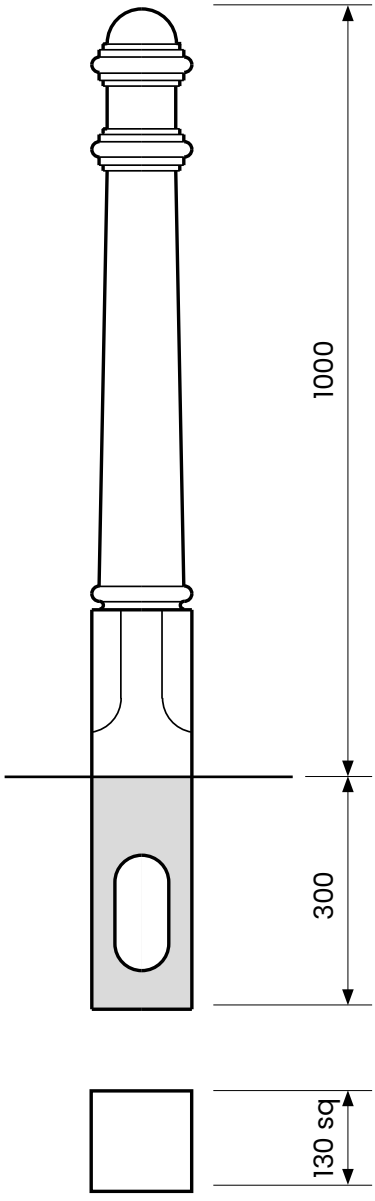

TECHNICAL INFO

Dimensions
- 1000 mm above ground
- 300 mm below ground

Materials
- Cast Iron
- Weight: 38kg

Finish:
- Polyamide to RAL9005

Installation:
- Root Fixed

Foundation depth is usually the same as the root depth of the bollard
Minimum recommended foundation diameter is the root diameter plus 200mm
Concrete mix to 25 newtons

Compliance:
- DDA
- BS 8300

furnitubes
shaping outdoor spaces

T: +44 (0)20 8378 3200
E: sales@furnitubes.com
www.furnitubes.com

Hammersmith Bollard.

Product Data sheet

Product Code
BD-HAM1-BD20

Hammersmith aluminium removable bollard.

TECHNICAL INFO

Dimensions
- 1000 mm above ground
- 320 mm below ground

Materials
- Cast Aluminium
- Weight: 20kg


Finish:
- Polyamide to RAL9005

Installation:
- Galvanized Removable Socket

Foundation depth 320mm

Minimum recommended foundation 450mm sq
Dig an additional drainage hole 80mm (d) x 150mm (sq) and fill with pea shingle (directly below socket)
Concrete mix to 25 newtons

Compliance:
- DDA
- BS 8300

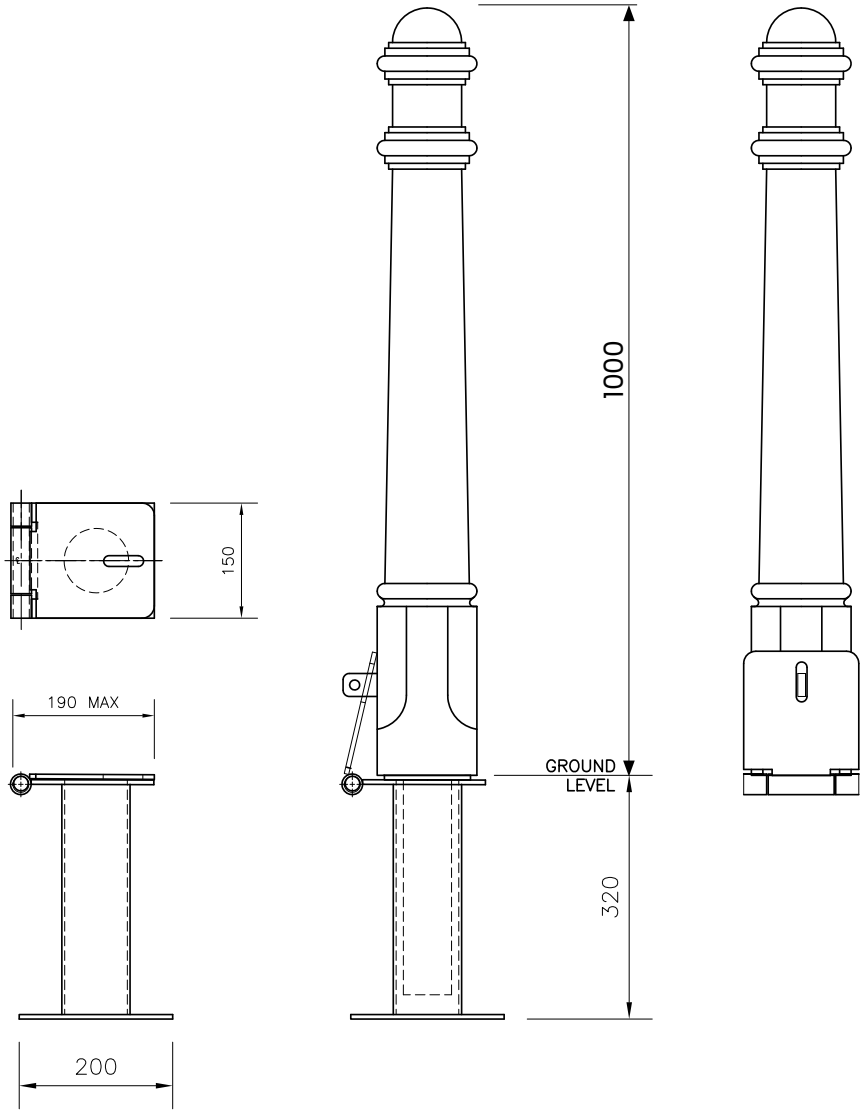

furnitubes
shaping outdoor spaces

T: +44 (0)20 8378 3200
E: sales@furnitubes.com
www.furnitubes.com